



# Product Data Sheet

## 9 Mil General Purpose Duct Tape (NDTHD)

Case of 2" General Purpose **Duct Tape** with high tensile strength, excellent moisture resistance, easy tear.

Good choice for bundling, heavy carton sealing, general maintenance, pipe wrapping, carpet fixing, air conditioning duct seam and joint sealing.

- 9.0 mil (0.178mm) thick
- 2" (48mm) wide
- Polyethylene-coated cloth tape
- Natural rubber adhesive.
- Tensile strength : 20 lb/in.
- Adhesion to steel: 35 oz/in. 3" neutral core/carton.

COLORS: Silver (Gray) and Black.


Save 10% when you order 2 or more cases

PE Coated cloth with rubber resin adhesive.


*Also known as?Utility Duct, Utility Duck, 9 Mil Duct, 9 Mil Duck, General Purpose Duct*

\*This product made in the USA.

## Spec Sheet

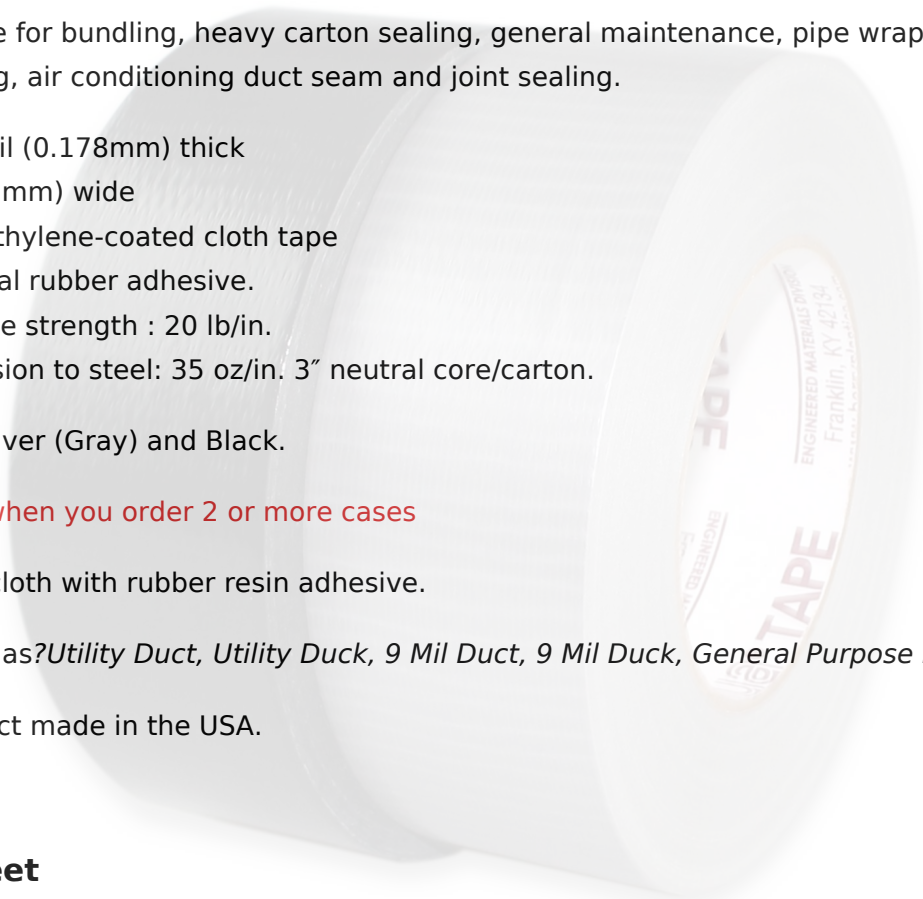

## Multi-Purpose Duct Tape

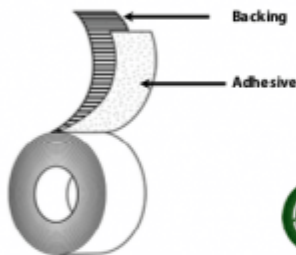

|                        |  |
|------------------------|--|
| <b>Backing:</b>        | PE Coated Cloth  |
| <b>Adhesive:</b>       | Rubber   |
| <b>Liner:</b>          | N/A  |
| <b>Colors:</b>         | Silver, Black, White, Blue, Brown, Burgundy, Green, OD, Red, Tan, Yellow |
| <b>Specifications:</b> | Tested in accordance with UL 723   |
| <b>Standard Sizes:</b> | 48mm x 55m, 72mm x 55m   |

### Applications

- General repair
- Sealing off polyethylene waste disposal bags
- Bundling & securing carpets, padding and protective sheeting for the convention and hotel industry
- General purpose abatement and contractor uses
- Bundling, patching, and mending
- Plumbing applications
- Color coding
- Heavy-duty box sealing

### Features

- PE-Coated Cloth Backing
- Natural rubber based adhesive
- Low VOC Content

### Benefits

- Good balance of strength & conformability
- Resists twisting & curling
- Available in 11 colors
- Moisture resistant
- Aggressive adhesion to smooth and rough surfaces
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Typical Test Values

|                              | Standard UOM | Metric UOM | Test Method |
|------------------------------|--------------|------------|-------------|
| <b>Total Thickness</b>       | 9.0 mils     | 0.229 mm   | ASTM D-1000 |
| <b>Adhesion to Steel</b>     | 70 oz/in     | 7.66 N/cm  | PSTC-101    |
| <b>Tensile Strength</b>      | 24 lb/in     | 42.03 N/cm | ASTM D-1000 |
| <b>Operating Temperature</b> | 40 to 200 °F | 4 to 93 °C |             |
| <b>Elongation</b>            | 20%          |            | ASTM D-1000 |
| <b>Smoke Developed</b>       | 0            |            | UL 723      |
| <b>Flame Spread</b>          | 5            |            | UL 723      |
| <b>VOC Content</b>           | <3 g/L       |            |             |

Recommended Storage Conditions: 60 - 80 °F at 40-60% RH  
Standard Shelf Life (at 25C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038  
1-800-343-7875 Fax 1-800-328-4822  
www.berryglobal.com  
11/20/17

NOTE: The physical properties listed above are typical test results obtained from a series of laboratory tests and should not be used for the purpose of writing specifications. Before using this product, user shall determine the suitability of the product for his/her use; and user assumes all risks and liabilities in connection therewith. All test procedures used are in accordance with ASTM and PSTC methods.

**tapedepot.com | support@tapedepot.com | 888.282.8273**