



Product Data Sheet


Painter's Grade Masking Tape

5.2 mil Painter's Grade Masking Tape with a specially formulated Solvent based rubber adhesive system that provides clean removal characteristics and UV resistance - up to 14 days of outdoor exposure. The special characteristic of the adhesive system that the peel adhesion does not increase with time, allow for removal of a wide variety of surfaces without surface damage. Rolls are individually shrink wrapped - perfect for retail sales.

- Tensile: 27.8 lbs/in.
- Peel adhesion: 19.4 oz/in.
- Maximum temperature resistance: 203 degrees F.
- Elongation: 10 degrees.

Alternative to Shutape CP27; IPG #PT8; Cantech #128-1; 3M #2090.

Also known as: Painter Masking Tape, Painter's Tape, Blue Painter's Tape.

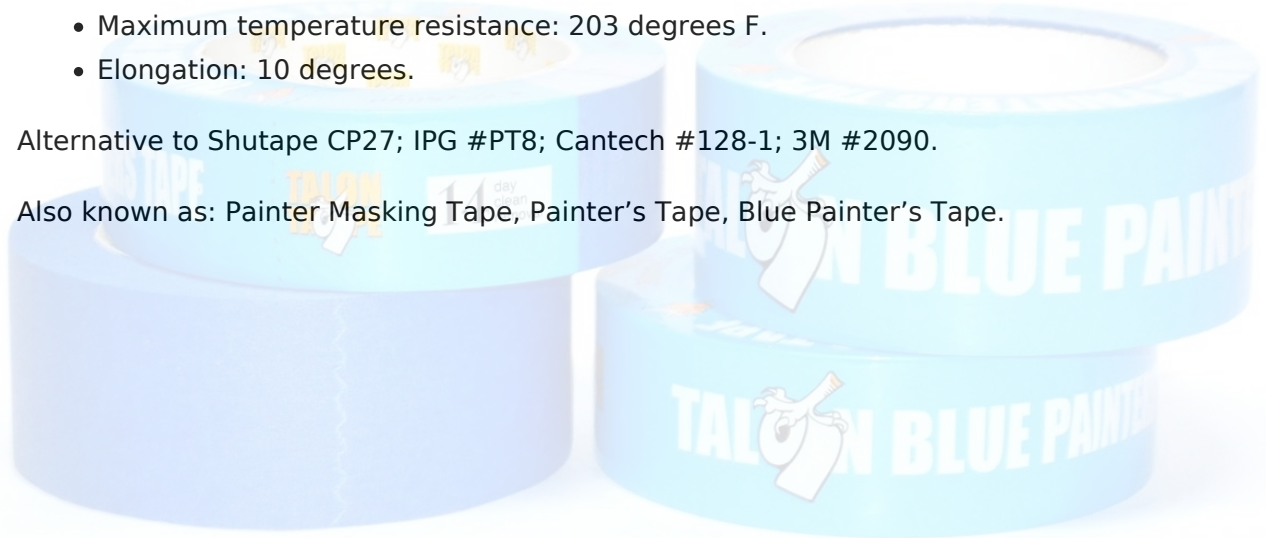

NOTE: The physical properties listed above are typical test results obtained from a series of laboratory tests and should not be used for the purpose of writing specifications. Before using this product, user shall determine the suitability of the product for his/her use; and user assumes all risks and liabilities in connection therewith. All test procedures used are in accordance with ASTM and PSTC methods.

tapedepot.com | support@tapedepot.com | 888.282.8273

2023-03-30 08:30:24 172.31.87.187